

AUGER DRIVE ATTACHMENTS

Belltec offers a complete lineup of hydraulic auger drives to meet the demanding needs of modern equipment operators. Constructed with the highest-quality components, expect years of top performance and reliability backed with the best warranty on the market.



DRILLING MADE SIMPLE. ANY MACHINE, ANY JOBSITE.



LC SERIES



LC Series Auger Drives are compact, lightweight, and robust, providing an ideal weight-to-power ratio.

Designed to operate at lower auxiliary flow rates, the LC Series is well-suited for smaller prime movers and will maximize any machine's drilling capability.

H SERIES



H Series Auger Drives are built for pros who expect serious performance in all drilling applications.

All H Series models feature an **interchangeable output shaft** allowing for a 2" Hex or 2-9/16" round. The output shaft is covered by our lifetime part replacement program. If this shaft ever breaks, ship it to us for a free replacement.

HTLS SERIES




HTLS Series Auger Drives are the most powerful models in the Belltec lineup, developed for the toughest drilling conditions.

Torque ranges from 6,000 to 10,000 ft-lbs and can be outfitted to a wide range of prime movers. The HTLS provides maximum torque and does not require a case drain.

DESIGNED TO MAXIMIZE YOUR EQUIPMENT

Belltec offers a wide range of mounting kits to ensure our customers get the most from their prime movers. From ranching and agriculture to rental and construction, our mounting kits are ideally suited for challenging environments and adapting your prime movers into highly effective drilling machines.

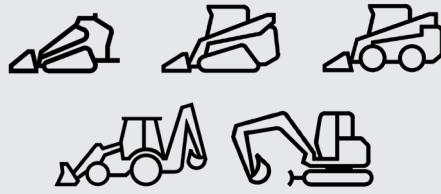

PERFORMANCE SPECIFICATIONS

LC SERIES

DRIVE MODEL	TORQUE Ft-Lbs	SPEED RPM	PRESSURE PSI	MAX FLOW GPM	OUTPUT SHAFT	MAX AUGER DIA. DIRT / ROCK
LC-150	1,764	91	3,500	15	2" Hex	18" / 18"
LC-200	2,038	105	3,500	20	2" Hex	30" / 24"
LC-300	2,929	110	3,500	30	2" Hex	36" / 36"
LC-350	3,529	106	3,500	35	2" Hex	36" / 36"

1. Continuous hydraulic pressure is 3,000 PSI. Intermittent pressure rating is 3,500 PSI.

2. LC Series Warranty - 5 Year Limited.

H SERIES

DRIVE MODEL	TORQUE Ft-Lbs	SPEED RPM	PRESSURE PSI	MAX FLOW GPM	OUTPUT SHAFT	MAX AUGER DIA. DIRT / ROCK
H-200	2,486	86	3,500	20	2" Hex / 2-9/16" Rnd	30" / 24"
H-300	3,572	90	3,500	30	2" Hex / 2-9/16" Rnd	36" / 36"
H-350	4,303	87	3,500	35	2" Hex / 2-9/16" Rnd	36" / 36"

1. Continuous hydraulic pressure is 3,000 PSI. Intermittent pressure rating is 3,500 PSI.

2. All H-Series models include two replaceable output shaft - a 2" Hex and a 2-9/16" Round.

3. H Series Warranty - 6 Year Limited - Lifetime Warranty on Replaceable Shaft.

HTLS SERIES

DRIVE MODEL	TORQUE Ft-Lbs	SPEED RPM	PRESSURE PSI	MAX FLOW GPM	OUTPUT SHAFT	MAX AUGER DIA. DIRT / ROCK
HTLS-6K	6,722	24	3,500	15	2" Hex	36" / 36"
HTLS-7K	7,767	28	3,500	20	2" Hex	36" / 36"
HTLS-10K	12,216	26	3,500	30	2-1/2" Hex	48" / 48"

1. Continuous hydraulic pressure is 3,000 PSI. Intermittent pressure rating is 3,500 PSI.

2. All H-Series models include two replaceable output shaft - a 2" Hex and a 2-9/16" Round.

3. HTLS Series Warranty - 3 Year Limited.

Note - All performance values are theoretical.



Proudly located in Belton, Texas, Belltec Industries has been designing, patenting, and producing innovative construction attachments for the mobile construction and off-highway equipment industry for over thirty years. We pride ourselves on offering products and solutions that will exceed our customers' expectations. We do more than build groundbreaking products; we provide results that ensure our customers get the job done.